


technical specifications

Product Name
 Product Description
 Pile Yarn Description
 Tile Dimensions
 Pile Weight
 Total Weight
 Total Thickness
 Backing Description
 Wear Classification
 Flammability
 Castor Chair Rating
 Static Loading
 Dynamic Loading
 Body Voltage Test
 Colour Fastness To Light
 Colour Fastness To Shampoo
 Sound Absorption Coefficient
 Reduction in Impact Noise
 Reduction in Impact Noise at 1000Hz
 Number Of Tiles Per Box
 BREEAM RATING

Lateral®
 Structure Bonded®
 85% Polypropylene 15% Nylon
 50 cm x 50 cm
 950g/m² +/-10%
 4200g/m² +/-10%
 7.8mm +/-10%
 Accummen™, 75% recycled
 Heavy Contract
 Euroclass Bfl-s1
 BS EN 985 Pass - suitable for continuous use
 BS 4939: 1987 (2003) Recovery >80% (24hrs)
 BS ISO 2094: 1999 (2005) Loss <20% (1000 impacts)
 BS ISO 6356:2000 <2kV
 BS EN ISO 105 - B02 Minimum grade 6
 BS 1006:UK-TB: 1990 Minimum Grade 4-5
 BS EN 354:2003
 BS EN ISO 140-8: Part 8: 1998 18dB
 BS EN ISO 140-8: Part 8: 1998 17.1dB
 20
 BREEAM A and A+ ratings across full product range.
 For specific rating, please refer to www.breem.co.uk

Recommended Layouts

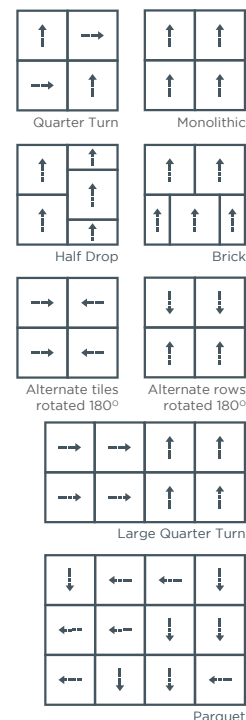

07
 0338-CPD-1005
 EN 14041:2004

Bfl-s1

NPD



This floor covering was made with renewable electricity



Environmental Profiles Scheme
 Certificate Number ENP353



Certificate Number FM01440
 BS EN ISO 9001:2008



Statement on level of emission of volatile substances in indoor air posing a toxic threat during inhaling - on a scale from A+ (very low-emission) to C (high-emission)

environmental information

- Burmatex products achieve either A or A+ across all the BREEAM defined building applications
- Burmatex products qualify for SKA as they achieve one or more requested criteria
- All Burmatex carpet/carpet tile ranges are made at its two UK manufacturing sites
- Wherever possible, raw materials are sourced from local suppliers i.e. within 20 miles
- Over 60% of all Burmatex yarn/fibre used is sourced locally
- Over 75% of Burmatex Accummen™ backing comes from recycled materials
- Continuous assessment and improvement of manufacturing process to minimise use of raw materials/power
- All manufacturing waste is recycled and all electricity used is from renewable resources
- All Burmatex products are heavy contract with a 10 year guarantee for maximum useful life
- Certified, Class A+: very-low VOC Emission

Burmatex Ltd,
 Victoria Mills, The Green,
 Ossett, West Yorkshire
 WF5 OAN, United Kingdom

T +44 (0) 1924 262 525
 F +44 (0) 1924 280 033
 UK email: projects@burmatex.co.uk
 International email: international@burmatex.co.uk
www.burmatex.co.uk

Burmatex reserves the right to improve the specification of all products without prior notification. E&OE

Orders are subject to Burmatex terms and conditions of sale. See www.burmatex.co.uk/termsandconditionsofsale