


HARO Sports Floors

Dominating the game.

Helsinki 15-10 L

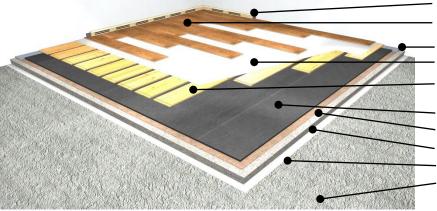

Type: Area-elastic sports floor Usage: Sports and multi-purpose facilities ideal for renovations

- HARO safety skirting
- HARO sports parquet Premium (dimensions: 2200 x 180 x 12.6 mm)
- Styrofoam strips along the perimeter of the floor PE-foil
- HARO load distribution strips (dimensions: 2500 x 175 x 12 mm)
- HARO elastic layer (dimensions: 2000 x 1500 x 10 mm)
- Moisture barrier
- Cement on existing subfloor
- Moisture barrier
- Raw concrete



heating compatible

Installation on an even sub-floor according to DIN 18202: 1997-04 chart 3, line 4	Model Helsinki 15-10 L
HARO elastic layer joints offset, laid out loosely	10 mm
HARO load distribution strips Tongue and groove ends, glued together, consisting of: -OSB4 strips with building approval, dimensions: 2500 x 175 mm	12 mm
PE-foil, 10 % overlapped, laid out loosely	0.03 mm
HARO sports parquet Premium, is an engineered hardwood flooring, tongue and groove gluing, stapled onto the load distribution strips Solid wood top layer 3.6 mm Factory finished with a highly wear resistant PERMADUR® sealing	12.6 mm
Construction height	34.6 mm

Model HELSINKI 15-10 L entirely meets and exceeds the EN 14909, DIN V 18032-2; April 2001 standards and is subject to the annual quality control RAL GZ 942

